



# PARASOUND

## ZoneMaster 2, 4 & 12 Amplifiers



### All ZoneMaster Features & Specifications:

- Universal applications from 60 to 150 watts
- High current design for stable operation at 2 Ohms
- A and B speaker outputs connections for each channel
- Class AB input stage plus premium Class D power stage
- Independent audio sensing triggers, one for each zone
- Independent 12 volt trigger inputs, one for each zone
- Looping 12 volt trigger outputs for each zone
- Speaker level input for expanding systems w/out pre out jacks
- Bus inputs (ZM4 and ZM12)
- Mono mode combines L and R for single speaker applications
- Separate level controls for all channels
- Detachable speaker connectors accept up to 12 gauge wire
- Rack mounting hardware is included in box (except ZM2)


### ZoneMaster 2 Specific Features:

- Full Range Mono RCA output
- 80Hz low pass Mono RCA output (for sub)
- Built in 80Hz low pass mode for driving passive in-wall sub(s)
- Half width chassis rack mount with optional ZRK



PARASOUND

# ZoneMaster 2, 4 & 12 Amplifiers

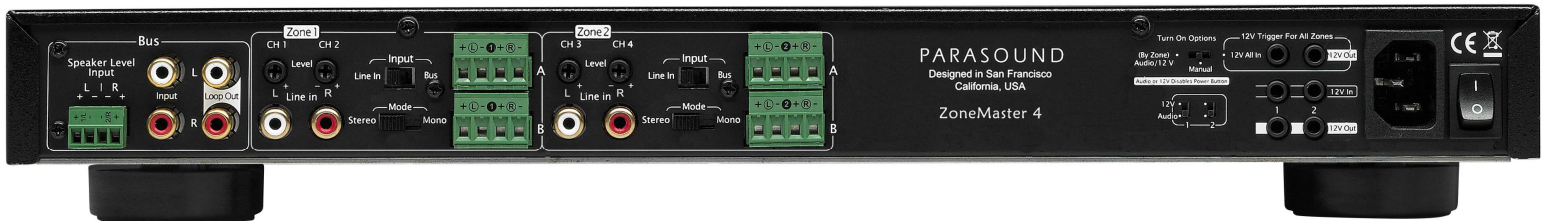

## ZoneMaster 2 (two channels)

120 watts x 2 @ 8Ω  
150 watts x 2 @ 4Ω or 2Ω

## ZoneMaster 4 (four channels)

120 watts x 4 @ 8Ω  
150 watts x 4 @ 4Ω or 2Ω

## ZoneMaster 12 (twelve channels)

### Zone 1 - High Power (ch 1 & 2)

120 watts x 2 @ 8Ω  
150 watts x 2 @ 4Ω or 2Ω

### Zone 2-6 (ch 3-12)

60 watts x 10 @ 8Ω  
100 watts x 10 @ 4Ω or 2Ω